



DIN Rail terminal blocks / GK series

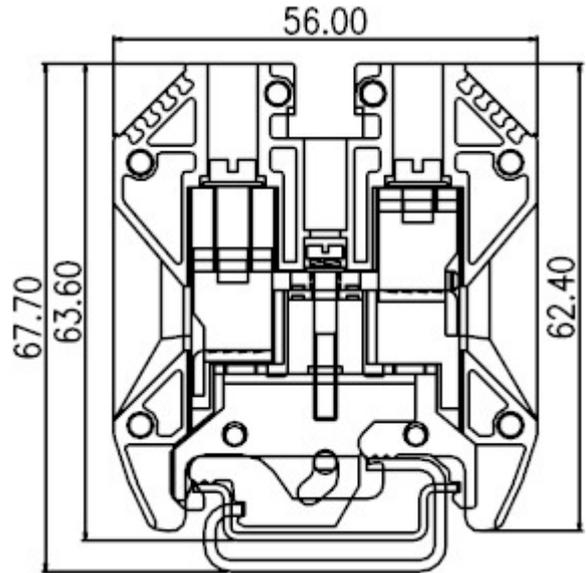

GK16

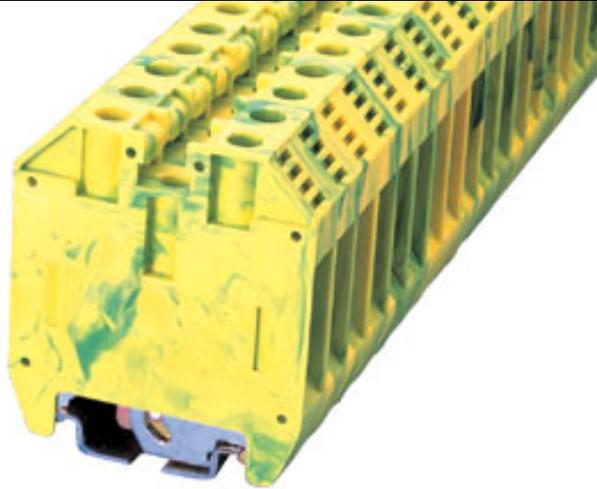

TxHxW(+0.2mm) 12.0x62.4x56

Approval	  	
Technical Data	UL	IEC
Rated voltage		1000V
Rated current	65A	76A
Wire range		
Solid wire (AWG/mm ²)	14~6	2.5~16
Stranded wire (AWG/mm ²)	14~6	2.5~16
Rated surge voltage (UL/IEC/Max.)	/ / 8 KV	
Torque (Lb-in)	30.4	
Screw	M5	
Wire strip length	14~18mm	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw