

# Filterfan

## PF 65.000

### Exhaust filter

## PFA 60.000




- installation size 6, air flow rate up to 505 m³/h
- three performance classes, cut-out compatible
- system of protection IP 54 and IP 55, NEMA type 12
- UL, cUL approval
- UV-resistance (IP 55 version)
- cut-out compatible with installation size 6 from the 3<sup>rd</sup> Generation and with cooling unit DTFI 9021 (see page 36)

Data		PF 65.000		Unit
Article number	IP 54	11665102055	11665152055	
	IP 55	11665103055	11665153055	
Rated voltage ± 10 %		AC 50 Hz / 60 Hz		
		230	115	V
Unimpeded airflow	IP 54	480 / 480		m³/h
	IP 55	505 / 505		
Airflow rate in combination (PF + PFA 60.000)	IP 54	370 / 370		
	IP 55	380 / 380		
Power consumption		65 / 80	75 / 90	W
Current consumption		0.3 / 0.36	0.66 / 0.8	A
Noise level (according to EN ISO 3741)	IP 54	54 / 52		dB (A)
	IP 55			
Weight		3.2		kg
Type of connection		spring-type terminal		
Fuse		6		A
System of protection according to EN 60529 / UL 50	IP 54	NEMA type 12 - standard filter		
	IP 55	NEMA type 12 - fluted filter		
Filtration efficiency	IP 54	91		%
	IP 55			
Filter mat quality class according to EN 779	IP 54	G 4		
	IP 55			
Duty cycle		100		%
Bearing type		ball bearing		
Service life L <sub>10</sub> (+ 40 °C) <sup>1</sup>		40000		h
Temperature range		- 15 ... + 55 / + 5 ... + 131		°C / °F
Design (housing and protection against accidental contact)	IP 54	made of injection-moulded thermoplastic, self-extinguishing, UL 94 VO		
	IP 55	additional: UV-resistant		
Colour		RAL 7035, different colours available on request		
Accessories	Piece	Article number		Information on page
Exhaust filter PFA 60.000	IP 54	1	11760002055	170
	IP 55	1	11760003055	170
Thermostat	1		17121000000	186/188

<sup>1</sup> fan failure is defined as being when the current and speed deviate or the operating noises are out of the ordinary  
Approvals see page 129


### Cooling capacity performance curves

PF 65.000 IP 54

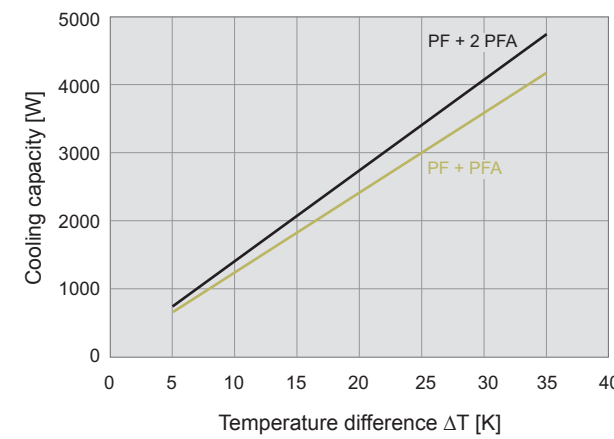


### Static pressure performance curves


PF 65.000 IP 54

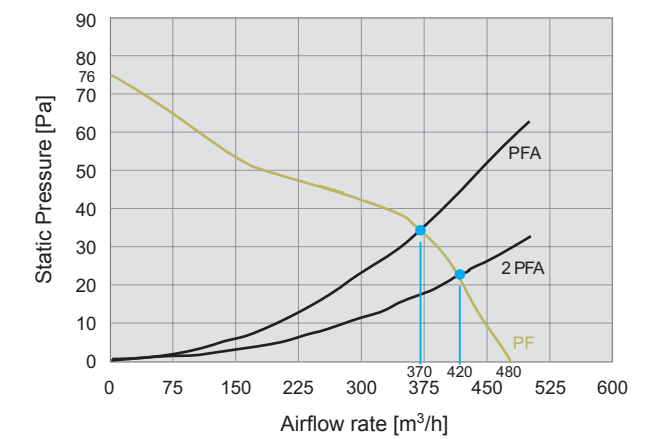

PF 65.000 IP 55

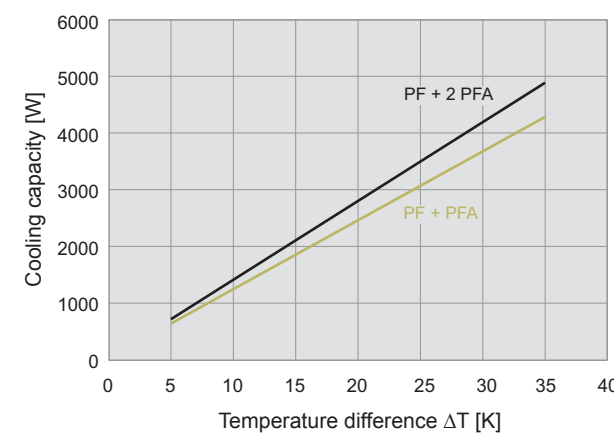

PF 65.000 IP 55

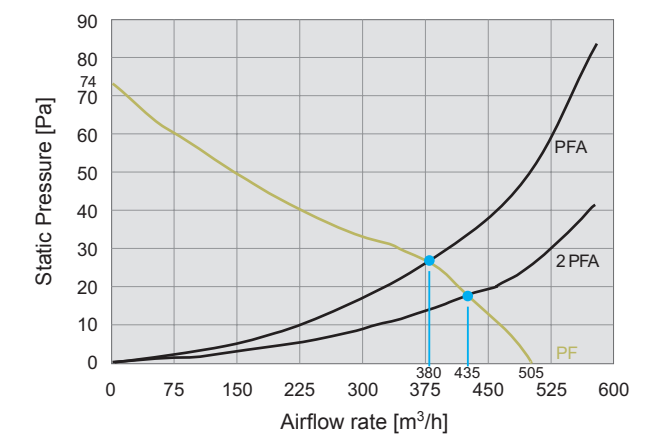

### Dimensions

mm	PF 65.000	PFA 60.000
X	320	320
Y	320	320
Z1	7	7
Z2	150	39
A <sup>1</sup>	291	291
B <sup>1</sup>	291	291

<sup>1</sup> for material thicknesses up to 2 mm  
+ 1 mm for thickness of material > 2 mm ≤ 3 mm

