



Produal Proxima® RU - room unit



Produal Proxima® RU is a simple room unit designed to be used with the Produal Proxima® CU control units or as Modbus RTU slave device. The basic version has a built-in temperature sensor and a set point knob.

The set point knob has an endless rotation function and the set point value can be reset via the building management system. The indicator lights indicate the current temperature set point.

The room unit can be ordered with additional measurements (CO₂ and/or relative humidity) and with a display that has back light adjustment. Also one or two touch buttons ( and ) are available.

The room unit connects to the Produal Proxima® CU with 4 wires. The cable between the room unit and control unit should be 2 x twisted pair or equivalent. One pair for Modbus communication and one pair for supply voltage.

Technical specifications


Property	Value
Supply	24 Vac/dc, < 1 VA (< 2 VA in CO2 models)
Temperature measurement	
Range	0...50 °C
Accuracy (18...26 °C)	±0,5 °C
Humidity measurement	
Range	0...100 %rH
Accuracy (25 °C)	typ. ±2 %rH (20...90 %rH), max. ±3 %rH
CO ₂ measurement	
Range	0...2000 ppm
Accuracy (25 °C)	typ. ±40 ppm +3 % from reading (automatic background calibration)
Long term stability / year	< 2 % FS (automatic background calibration)
Time constant	< 2 min
Communication	Modbus RTU
Operating conditions	
Temperature	0...50 °C
Humidity	0...85 %rH (non-condensing)
Wiring terminals	1,5 mm ² , spring terminals

Property	Value
Housing	ABS/PC plastic, IP20
Mounting	on the wall surface or on the standard flush mounting box (60 mm hole distance)
Dimensions (w x h x d)	97 x 97 x 33 mm

Wiring

CAUTION: Device wiring and commissioning can only be carried out by qualified professionals. Always make the wirings while the power is switched off.

The terminals are designed for maximum of 1,5 mm² cable area. Please note that the cables for communication (RS-485) should be twisted pair (2x2 pairs). The cable length to the room units should not exceed 10 m.

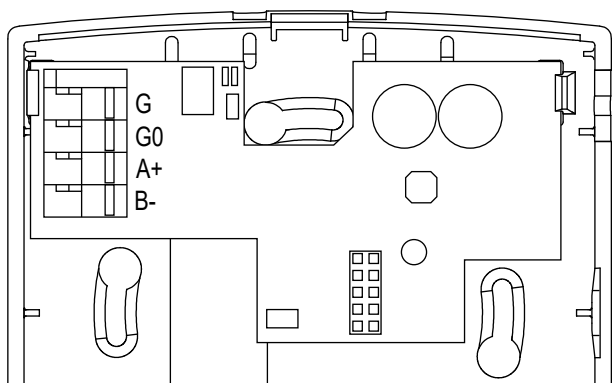


G	24 Vac/dc, < 1 VA (< 2 VA in CO2 models)
G0	0 V
A+	Modbus RTU (RS-485)
B-	

Ordering information

		Type	0	1	2	3	4	5	6
0	Room unit type		5202					0	0
1	Body colour	White	RU	W					
		Black	RUB	B					
2	Buttons	No buttons			0				
		1 button (fan speed)	1F		1				
		1 button (man in house)	1M			2			
		2 buttons (fan speed and man in house)	2FM			3			
3	Display	No display (indicator lights only)				0			
		Display (indicator lights are also included)	-D			D			
4	Additional measurements	No additional measurements					0		
		Relative humidity	-RH				1		
		CO ₂	-CO ₂				3		
		Relative humidity and CO ₂	-RH-CO ₂				5		

For example, ordering a black room unit with display and a fan button: The product type is RUB1F-D and the product number is 5202B1D000.

Dimensions

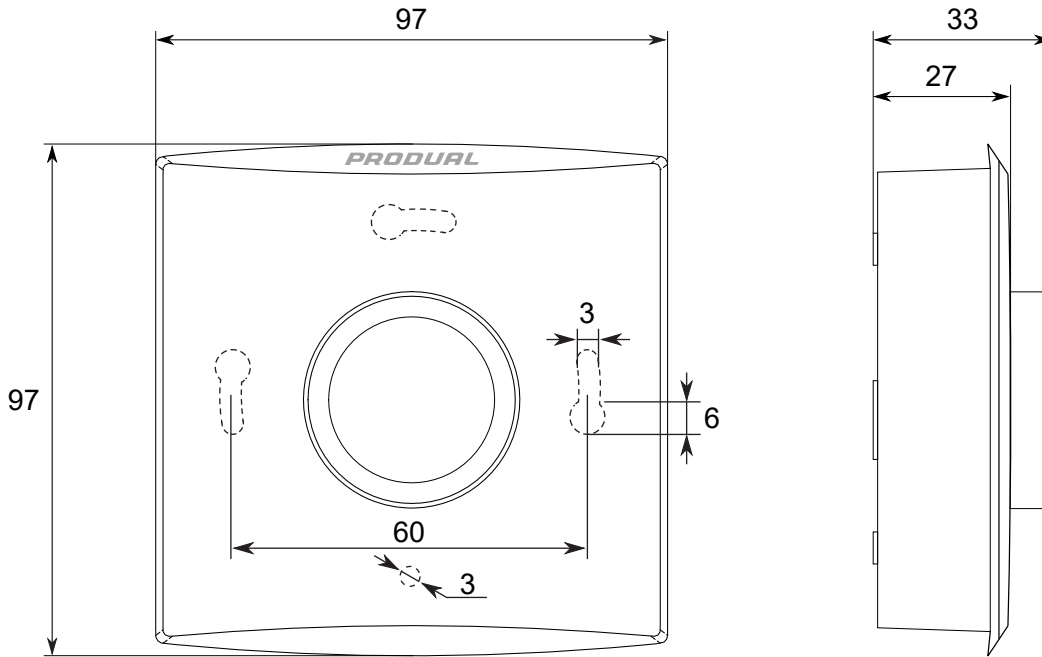

Supported standards and directives

Standard	Description
2014/30/EU	Electromagnetic Compatibility (EMC).
2011/65/EU	Restriction of Hazardous Substances (RoHS2) Directive.
(EU) 2015/863	Commission Delegated Directive, amending Annex II to Directive 2011/65/EU.
EN 61000-6-2:2019	Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity for industrial environments.
EN 61000-6-3:2007/ A1:2011	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments.
EN 61000-4-2:2009	Electromagnetic compatibility (EMC). Testing and measuring techniques - Electrostatic discharge immunity test.
EN 61000-4-3:2006/ AMD1:2007+AMD2:2010	Electromagnetic compatibility (EMC). Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test.
EN 61000-4-4:2012	Electromagnetic compatibility (EMC). Testing and measurement techniques - Electrical fast transient/burst immunity test.
EN 61000-4-5:2014/ AMD1:2017	Electromagnetic compatibility (EMC). Testing and measurement techniques - Surge immunity test.
EN 61000-4-6:2014	Electromagnetic compatibility (EMC). Testing and measurement techniques. Immunity to conducted disturbances, induced by radio-frequency fields.