

# SPDE



## Single Phase Compact Power Supply



### Benefits

- **Compact dimensions:** SPDE can save up to 50% panel-width space thanks to its ultra-slim design. The 480 W model is just 48 mm wide.
- **High efficiency:** The built-in PFC (on SPDE..R models) results in high operating efficiency up to 94%.
- **Flexible installation:** Universal AC/DC input range with AC voltage (90 VAC to 264 VAC) or with DC voltage (120 VDC to 370 VDC).
- **Integrated protection:** Output short circuit, over-current, over-voltage, over-temperature protection.
- **Wide operating temperature:** SPDE..R models can work in extreme temperatures from -40°C to +70°C (-40°F to +158°F).

### Description

The SPDE series of DIN-rail mount power supplies encompasses high performance within an extremely compact footprint. Power ratings start from 75 W up to 480 W with 12, 24 and 48 VDC output. The SPDE achieves high operating efficiency of up to 94% @ 230 VAC. Features such as DC ok output relay (for SPDE..R models) and built-in protection functions ensure a high degree of reliability during operation.

All specifications are at nominal values, full load, 25°C unless otherwise stated.

### Applications

Installations with limited panel space, industrial equipment, machinery.

### Main functions

- Output short circuit, over-current, over-voltage and over-temperature protection
- DC OK relay indication (only in SPDE..R models)
- Built-in active PFC (only in SPDE..R models)

## References

### Order code

 SPDE   1



Enter the code entering the corresponding option instead of .

Code	Option	Description	Notes
S	-	Switching	Device typology
P	-	Power	
D	-	DIN rail	
E	-	High efficiency	Mounting
<input type="checkbox"/>	12	12 VDC	Rated output voltage
	24	24 VDC	
	48	48 VDC	
<input type="checkbox"/>	75	75 W	Rated output power
	120	120 W	
	190	192 W	
	240	240 W	
	480	480 W	
1	-	Single phase input	Input type
<input type="checkbox"/>	-	-	
	R	Relay output	

### Selection guide


Output Voltage	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
12 VDC	SPDE12751	SPDE121201 SPDE121201R	SPDE121901R	-	-
24 VDC	SPDE24751	SPDE241201 SPDE241201R	-	SPDE242401R	SPDE244801R
48 VDC	SPDE48751	SPDE481201 SPDE481201R	-	SPDE482401R	SPDE484801R

### Further reading

Information	Where to find it	QR code
SPDE datasheet	<a href="https://gavazziautomation.com/images/PIM/DATASHEET/ENG/SPDE_DS_ENG.pdf">https://gavazziautomation.com/images/PIM/DATASHEET/ENG/SPDE_DS_ENG.pdf</a>	
SPDE installation sheet	<a href="https://gavazziautomation.com/images/PIM/MANUALS/ENG/SPDE_IM.pdf">https://gavazziautomation.com/images/PIM/MANUALS/ENG/SPDE_IM.pdf</a>	

# Structure


SPDE..75 / SPDE..120 / SPDE..190 / SPDE..240

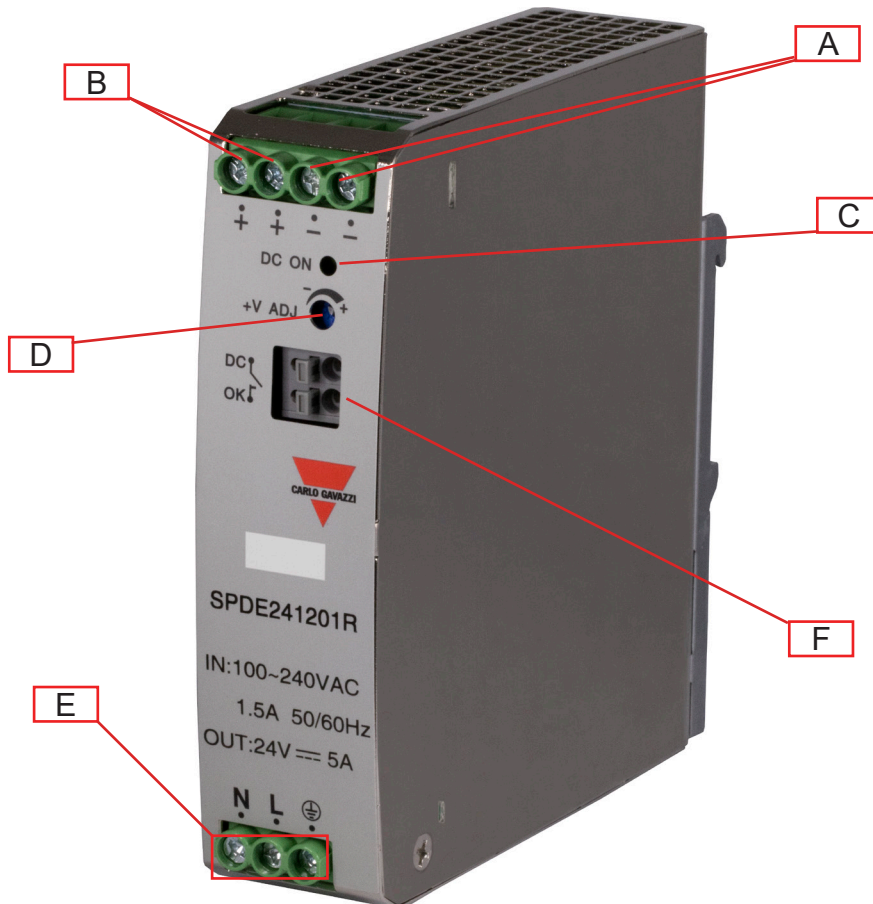

Element	Component	Function
A	- V terminals	Negative DC Output terminals
B	+ V terminals	Positive DC Output terminals
C	DC OK LED	Green when output voltage is active
D	VADJ trimmer	Output voltage adjustment
E	Input terminals	L, N supply terminals and Protective Earth (PE)
F	DC OK relay*	Relay rating: 30 VDC / 1 A max. (resistive load) Relay contacts closed when output voltage $\geq$ 90% of rated output voltage.

\* applies to SPDE..R models only

**SPDE..480R**

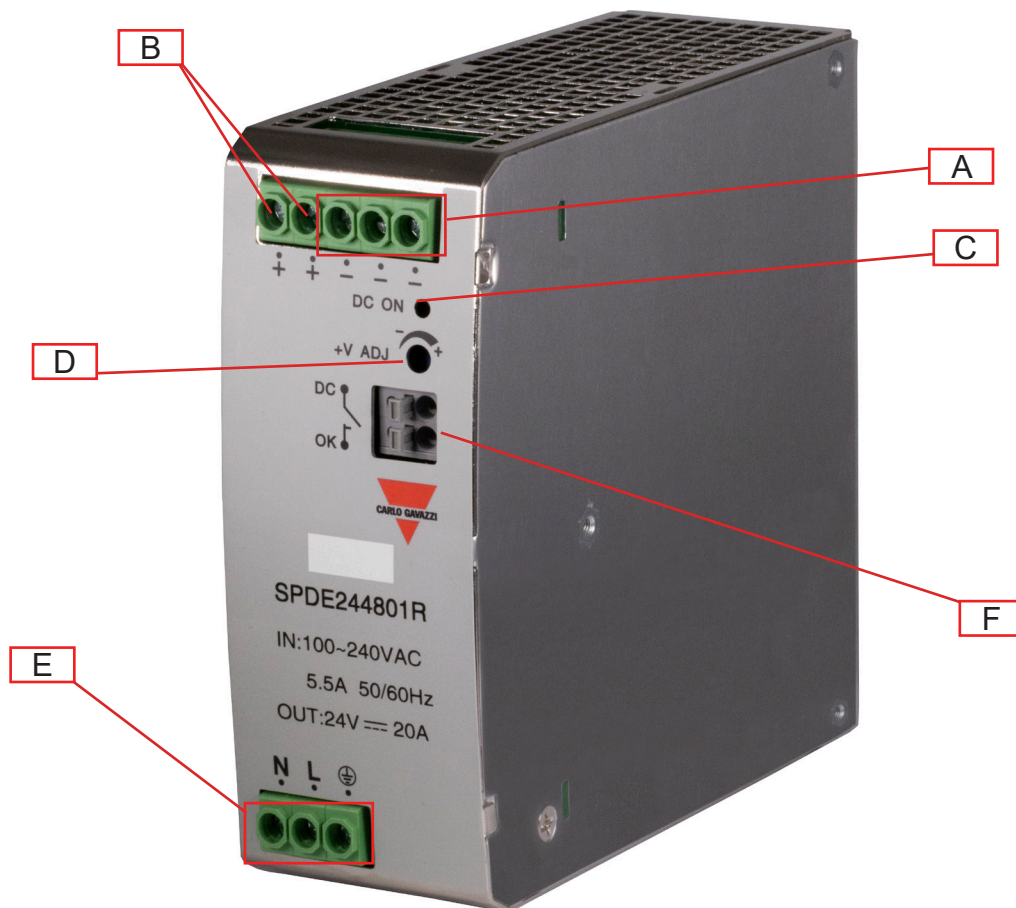

Element	Component	Function
A	- V terminals	Negative DC Output terminals
B	+ V terminals	Positive DC Output terminals
C	DC OK LED	Green when output voltage is active
D	VADJ trimmer	Output voltage adjustment
E	Input terminals	L, N supply terminals and Protective Earth (PE)
F	DC OK relay	Relay rating: 30 VDC / 1 A max. (resistive load) Relay contacts closed when output voltage $\geq$ 90% of rated output voltage.

# Features

## General data


	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
Leakage current (input-output)	<0.5 mA	<1.0 mA	<0.5 mA		<0.8 mA
Earth leakage current (input-GND)		-	<1.0 mA		-
Efficiency	86% (12 VDC) 89% (24 VDC) 90% (48 VDC)	85% (12 VDC) 88% (24 VDC) 89% (48 VDC)	92% (12 VDC)	94% (24 VDC) 94% (48 VDC)	94% (24 VDC) 94% (48 VDC)
Power loss @ nominal load	≤1.5W	15 W	23 W		35 W
Power factor (full load)					
115 VAC	-		0.98		0.99
230 VAC			0.94		0.99
Ingress protection	IP20				
MTBF (MIL-HDBK-217F)	>300,000 h				
Case material	Metal	Metal Metal and plastic*			
Weight	350 g	410 g 490 g ± 10%*	600 g	650 g	980 g

\* applies to SPDE..R models only

## Dimensions


### SPDE..75

Unit: mm [inch]

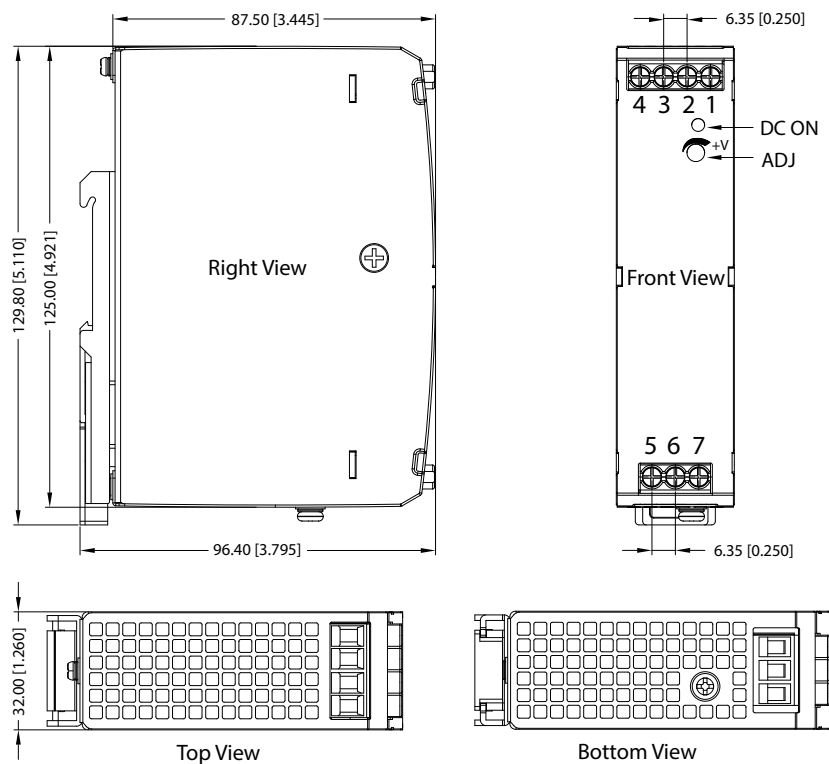


**SPDE..120**

Unit: mm [inch]

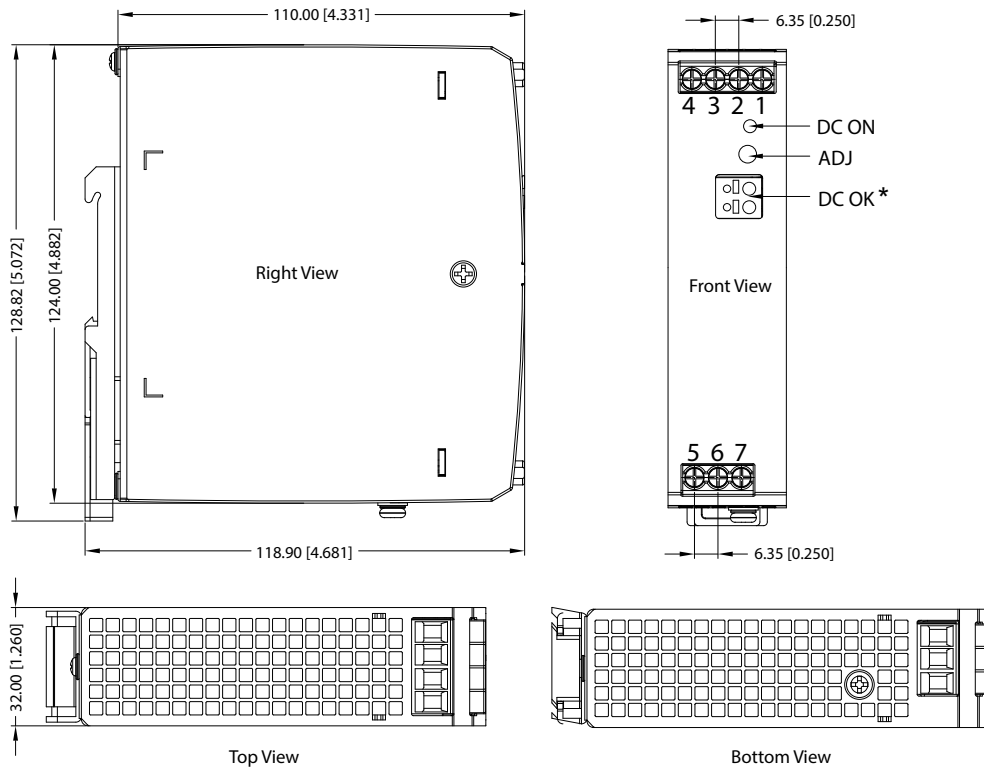


**SPDE..190 / SPDE..240**

Unit: mm [inch]

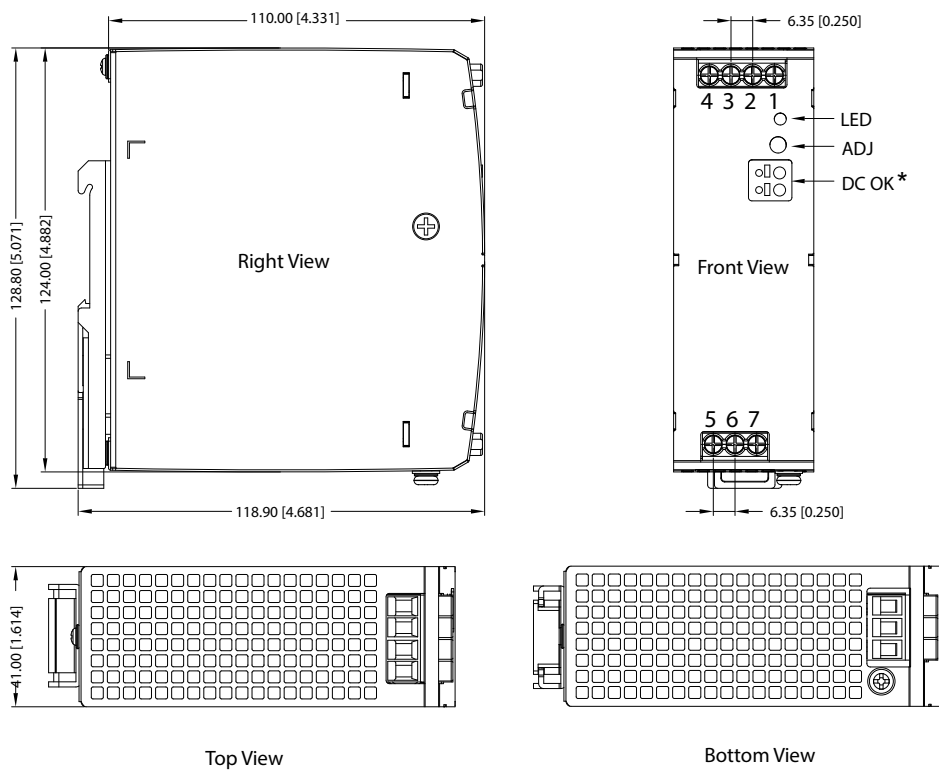

**SPDE..480**

Unit: mm [inch]

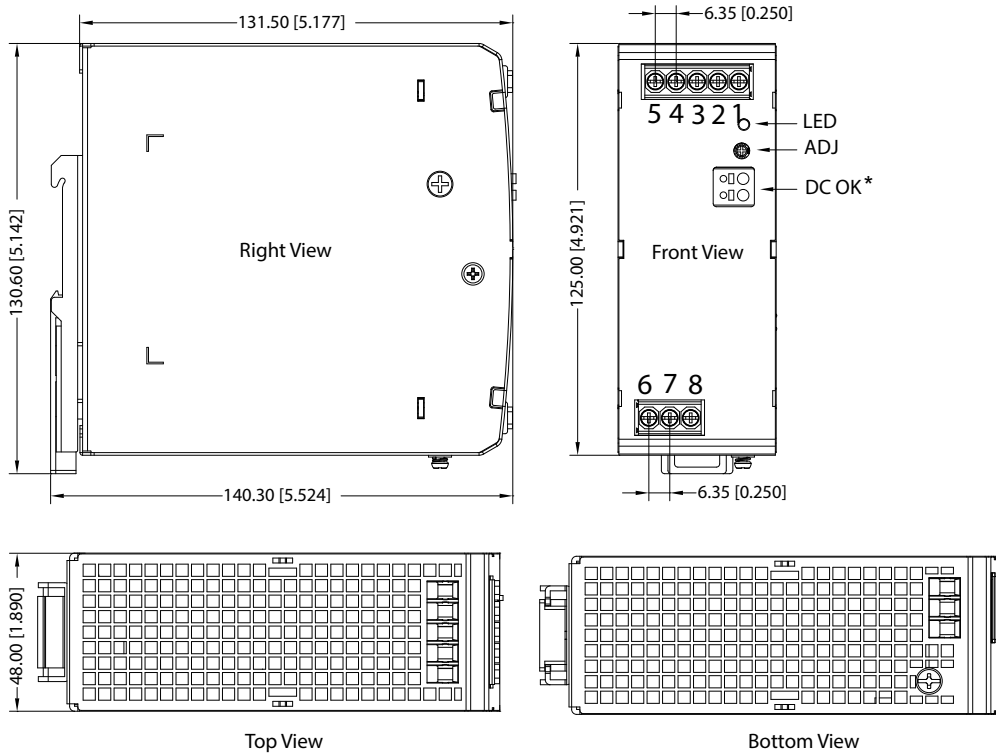


\* applies to SPDE..R models only

# Connection diagram

## Terminal markings


### SPDE..75 / SPDE..120 / SPDE..190 / SPDE..240

Terminal	Designation	Description
1	-V <sub>o</sub>	Negative output terminal
2	-V <sub>o</sub>	Negative output terminal
3	+V <sub>o</sub>	Positive output terminal
4	+V <sub>o</sub>	Positive output terminal
5	AC(N)	Input terminals (neutral conductor, no polarity with DC input)
6	AC(L)	Input terminals (phase conductor, no polarity with DC input)
7	PE	Ground this terminal to minimize high frequency emissions

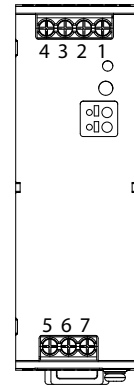

### SPDE..480

Terminal	Designation	Description
1	-V <sub>o</sub>	Negative output terminal
2	-V <sub>o</sub>	Negative output terminal
3	-V <sub>o</sub>	Negative output terminal
4	+V <sub>o</sub>	Positive output terminal
5	+V <sub>o</sub>	Positive output terminal
6	AC(N)	Input terminals (neutral conductor, no polarity with DC input)
7	AC(L)	Input terminals (phase conductor, no polarity with DC input)
8	PE	Ground this terminal to minimize high frequency emissions

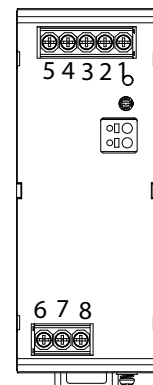



**Environmental**

	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
Operating temperature	-30°C to 70°C -22°F to 158°F	-20°C to 60°C -4°F to 140°F	-40°C to 70°C -40°F to 158°F		-30°C to 70°C -22°F to 158°F
Storage temperature	-40°C to 85°C -40°F to 185°F				
Humidity	<95% RH Non-condensing				
Temperature derating	Refer to derating diagram				

**Compatibility and conformity**

	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
Safety standards	UL/EN62368-1 UL61010-1 (pending)	EN62368-1 UL61010-1 UL61010-2-201*	EN62368-1 UL61010-1 UL61010-2-201		EN62368-1 UL61010-1
Conducted (CS) IEC/EN 61000-4-6	10 Vrms (PC A)				
Voltage dips and interruptions IEC/EN61000-4-11	0% (PC B) 70% (PC B)				0% (PC A) 70% (PC A)
EMC emission CE: CISPR32/EN55032 RE: CISPR32/EN55032	CLASS B CLASS B	CLASS A CLASS A	CLASS B CLASS B		
Harmonic current	IEC/EN61000-3-2 CLASS A		IEC/EN61000-3-2 CLASS A and CLASS D		
EMC immunity	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11				
Vibration resistance	10 ~ 500 Hz, 2G, 10 min. / 1 cycle, period for 60 min. Each along X, Y, Z axes.				

\* applies to SPDE..R models only

**Insulation**

	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
Insulation / withstand voltage (input / GND)	2.0 kVAC / < 10 mA				
Insulation / withstand voltage (input / output)	4.0 kVAC / < 10 mA		3.0 kVAC / < 10 mA		
Insulation / withstand voltage (output / GND)	0.5 kVAC / < 10 mA				
Output / DC OK*	-	30 VDC / 1A max. (resistive load)			
Insulation resistance	≥ 50 MΩ	≥ 100 MΩ	≥ 50 MΩ		≥ 100 MΩ
Overvoltage category	II				
Pollution degree	2				

\* applies to SPDE..R models only

**Inputs**

	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
Rated input voltage	-		100 VAC to 240 VAC		-
Input voltage range	90 VAC to 264 VAC		85 VAC to 264 VAC		
	120 VDC to 370 VDC	127 VDC to 370 VDC	120 VDC to 370 VDC		
AC current (max)	115 VAC 230 VAC	<2.0 A <1.0 A	<2.7 A <1.6 A	<3 A <1.5 A	<5 A <2.5 A
Frequency range	47 Hz to 63 Hz				
Inrush current	115 VAC 230 VAC	25 A 45 A	30 A 55 A	15 A 30 A	20 A 40 A

**Outputs**



	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
Output power	75 W	120 W	192 W	240 W	480 W
Voltage accuracy	±2 % (12 VDC) ±1 % (24/48 VDC)		±2 %	±1 %	±1%
Line regulation	±0.5 %				
Load regulation	±1.0 %				
Voltage regulation span	12 VDC 24 VDC 48 VDC	12 V to 14 V 24 V to 28 V 48 V to 53 V	12 V to 14 V 24 V to 28 V 48 V to 55 V	12 V to 14 V  24 V to 28 V 48 V to 53 V	24 V to 28 V 48 V to 56 V
Rated output current	12 VDC 24 VDC 48 VDC	6.3 A 3.2 A 1.6 A	10 A 5 A 2.5 A	16 A  10 A 5 A	20 A 10 A
Ripple and noise 20 MHz bandwidth	12 VDC 24 VDC 48 VDC	< 80 mV < 120 mV < 150 mV	< 100 mV < 120 mV < 150 mV	75 - 150 mV  60 - 120 mV 75 - 150 mV	<100 mV <120 mV
Hold up time	≥ 12 ms (115 VAC) ≥ 60 ms (230 VAC)	≥ 8 ms (115 VAC) ≥ 16 ms (230 VAC)	≤ 20 ms		≤ 22 ms
Set-up time	< 3 s	2.5 s (115 VAC) 1.2 s (230 VAC) < 3 s*	< 1 s		< 3 s
Rise time	-	≤ 60 ms ≤ 100 ms*	< 100 ms		< 150 ms
Turn-on overshoot	< 10 %				
Overshoot and undershoot	±10%		< 10 %		±10%
Power boost	-	110%~150% of rated output current within 1 s / 3 s*	150% of rated output current		110%~150% of rated output current within 1 s

\* applies to SPDE..R models only



# Performance

## Current derating



### SPDE..75

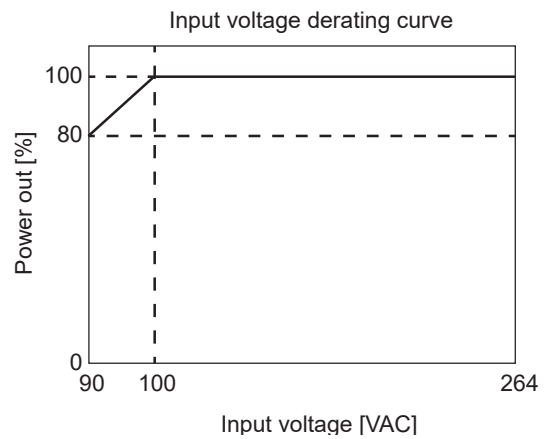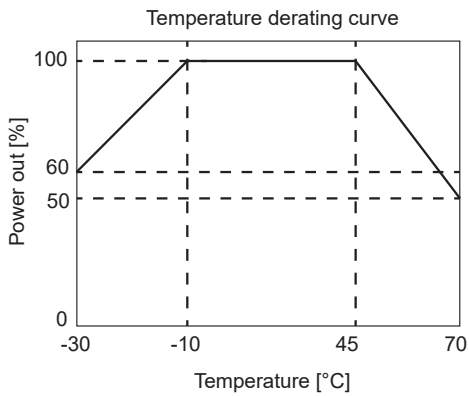



### SPDE..120

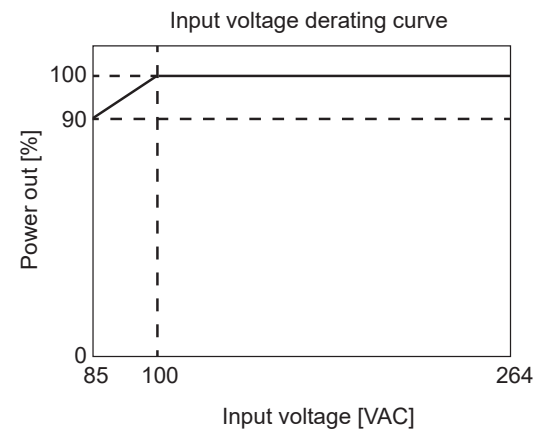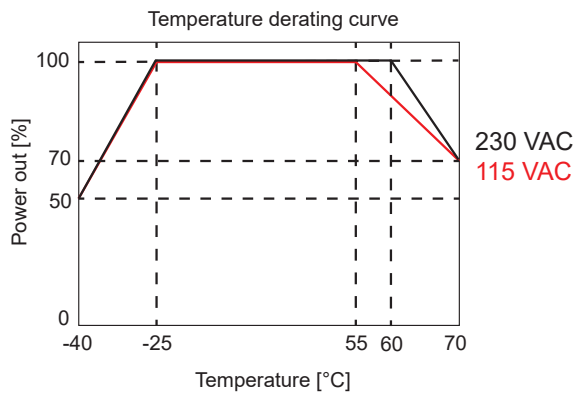



### SPDE..190

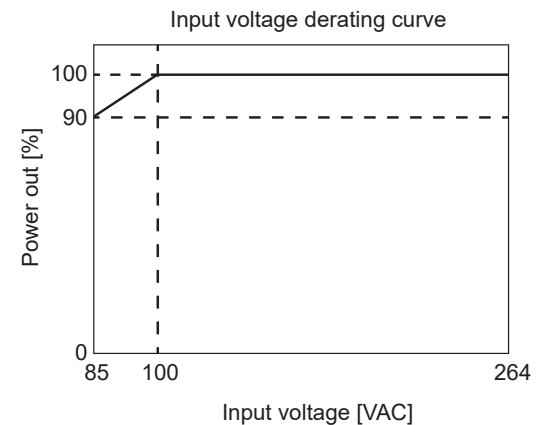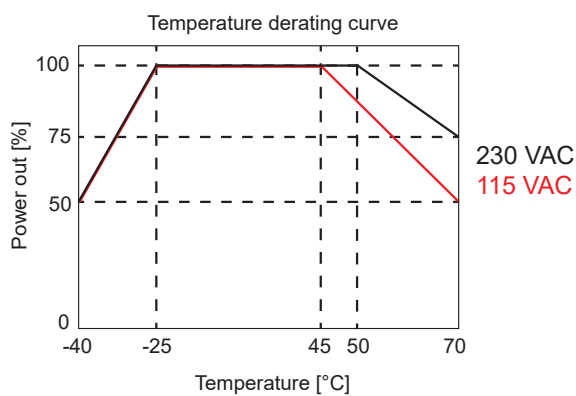

**SPDE..240**

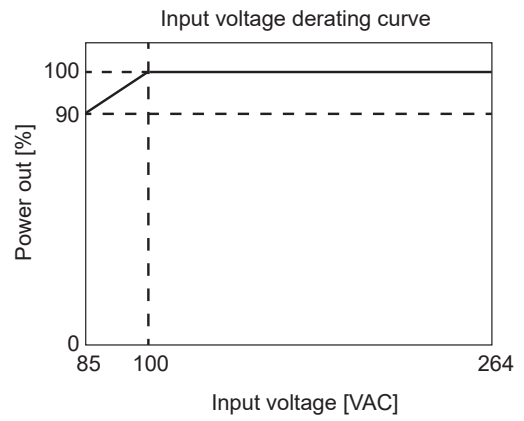
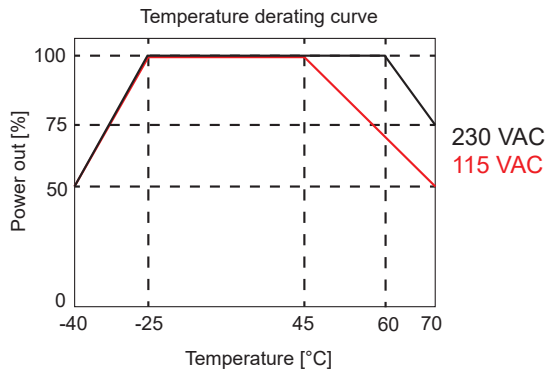


**SPDE..480**

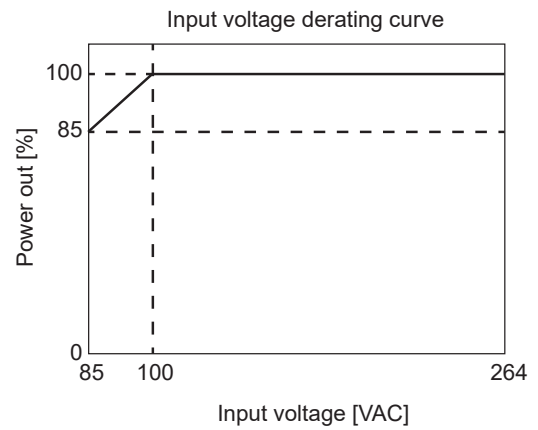
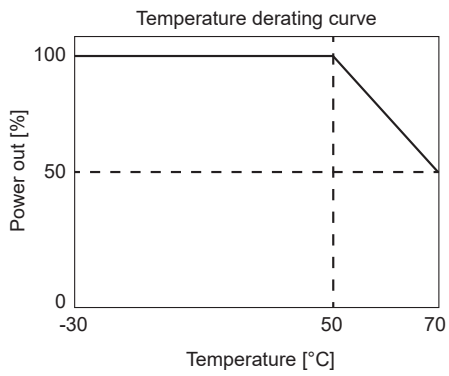


**Efficiency**



**SPDE..75**

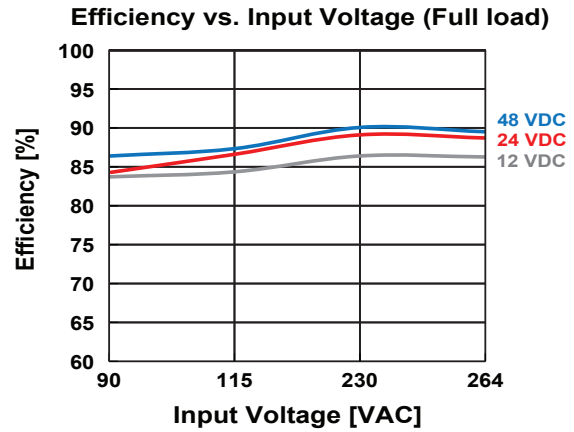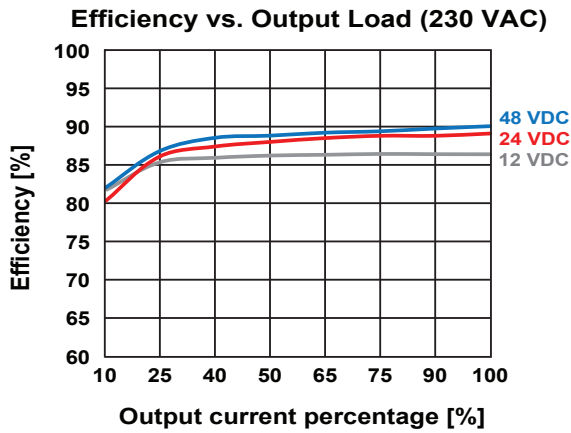

**SPDE..120**

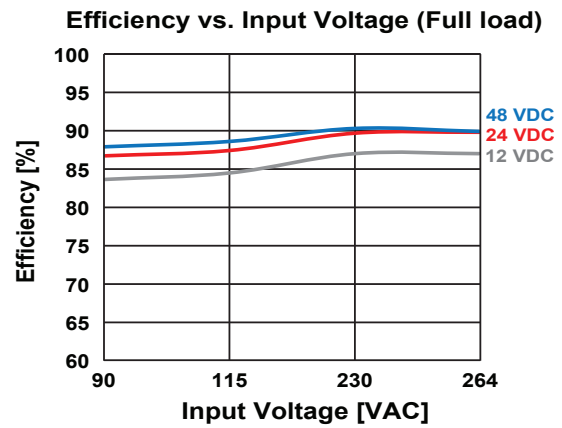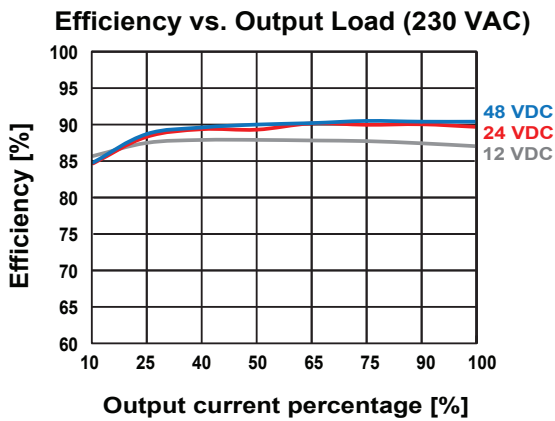


**SPDE..120R**

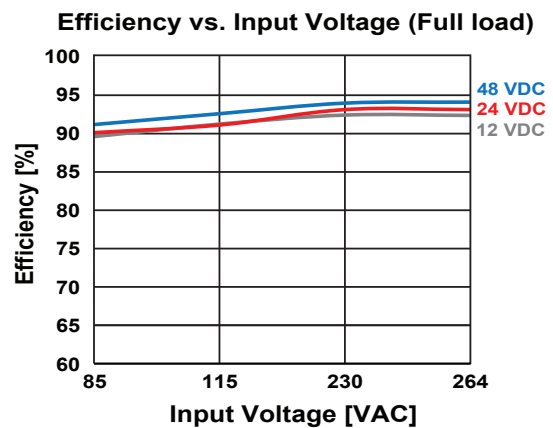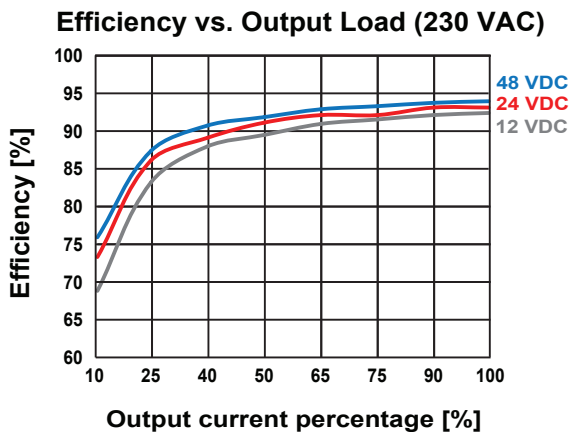


SPDE..190

Efficiency vs. Output Load (230 VAC)

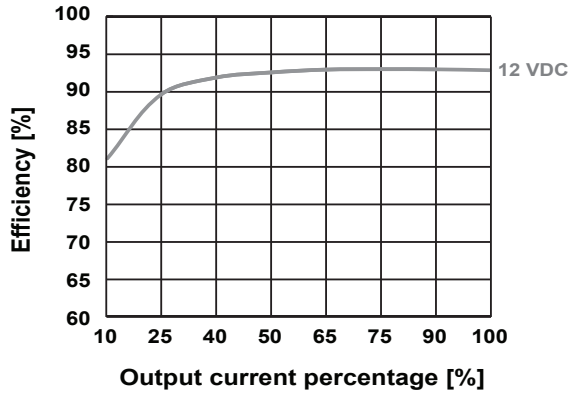


Efficiency vs. Input Voltage (Full load)

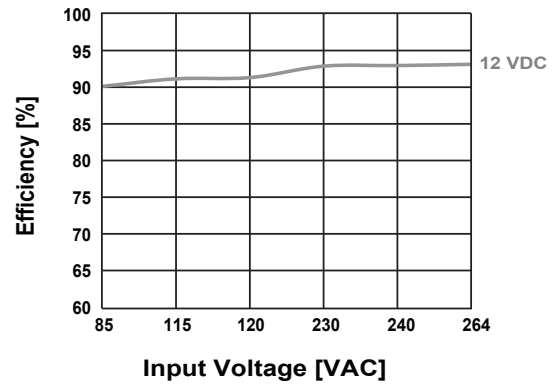


SPDE..240

Efficiency vs. Output Load (230 VAC)

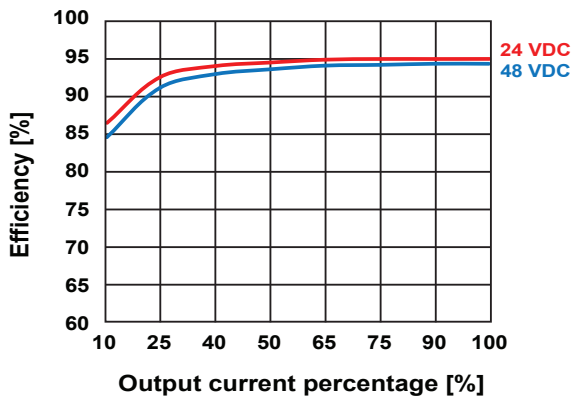


Efficiency vs. Input Voltage (Full load)

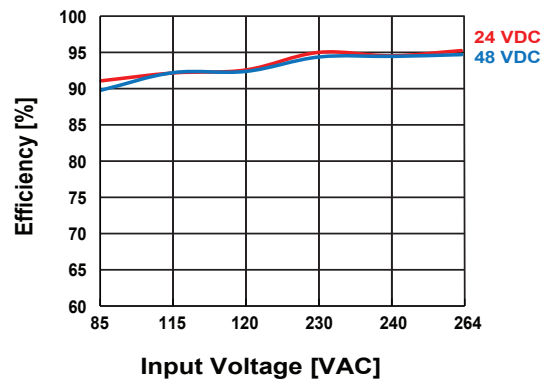


SPDE..480


Efficiency vs. Output Load (230 VAC)

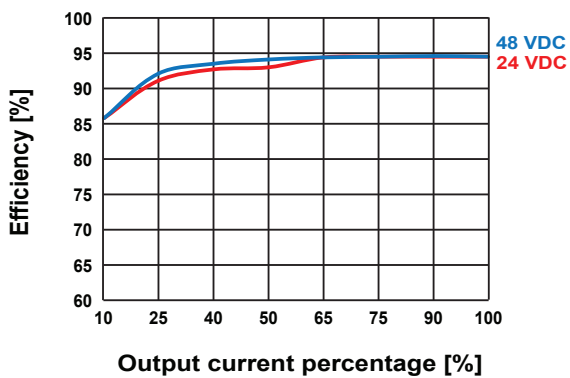

Efficiency vs. Input Voltage (Full load)

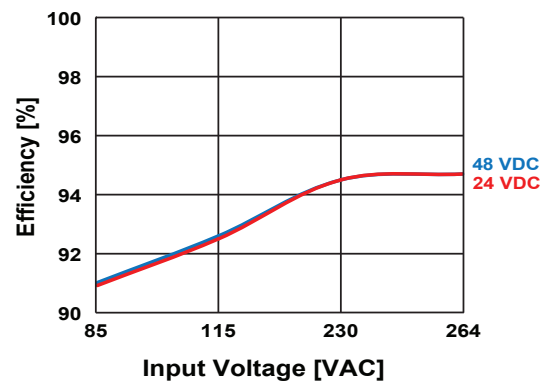

**Wiring diagram**

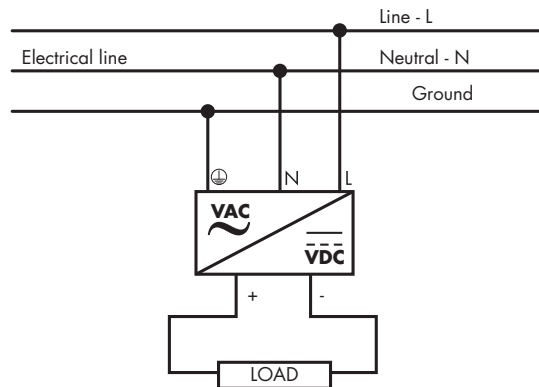


**Connection specification**

	SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
<b>Terminal type</b>	Screw terminals with Phillips screw head				
<b>Screw driver blade</b>	3.5 mm slotted or Phillips				
<b>Tightening torque (recommended)</b>	0.4 Nm		0.79 Nm		0.5 Nm
<b>Conductor cross section (input terminals)</b>	0.14 - 6 mm <sup>2</sup> (26 - 10 AWG)		0.14 - 6 mm <sup>2</sup> (26 - 10 AWG)		0.5 - 6 mm <sup>2</sup> (20 - 10 AWG)
<b>Conductor cross section (PE connection)</b>			4 - 6 mm <sup>2</sup> (12 - 10 AWG)		
<b>Conductor cross section (output terminals)</b>			1.5 - 6 mm <sup>2</sup> (16 - 10 AWG)	4 - 6 mm <sup>2</sup> (12 - 10 AWG)	2.5 - 6 mm <sup>2</sup> (14 - 10 AWG)
<b>DC OK relay output*</b>	-	0.25 - 1.5 mm <sup>2</sup> (24 - 16 AWG)			

\* applies to SPDE..R models only

**Block diagram**

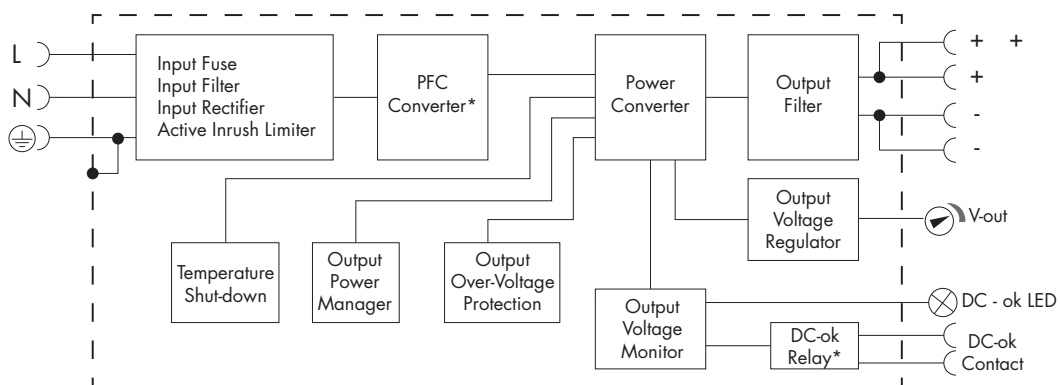

\* only in SPDE..R versions

## Operating description

### Control and protection

		SPDE..75	SPDE..120	SPDE..190	SPDE..240	SPDE..480
<b>Overvoltage protection</b>						
	<b>12 VDC</b>	≤ 17 V	≤ 16 V	≤ 18 V		
	<b>24 VDC</b>	≤ 33 V	≤ 33 V		≤ 35 V	29 - 35 V
	<b>48 VDC</b>	≤ 60 V	≤ 60 V		≤ 60 V	56 - 60 V
<b>Over-current protection</b>	<b>100% ~ 150% of rated current</b>	Constant current mode, automatic recover after fault condition is removed		Self-recovery		The output turned off after working normally for 1 s, self-recovery
	<b>&gt;150% of rated current</b>					Automatic recover after fault condition is removed
<b>Current limiting</b>		< 2 A	< 2.7 A (115 VAC) < 1.6 A (230 VAC) < 1.5 A*	< 4 A		< 5.5 A
<b>Short circuit protection</b>		Constant current, continuous, self-recovery				Hiccup, continuous, self-recovery
<b>Over temperature protection</b>		Output voltage turn off, re-power on for recover after the temp. drops.	Output voltage turn off, re-power on for recover.	80°C		60°C to 90°C
<b>Reverse voltage protection</b>		No				